




Product Code 0330

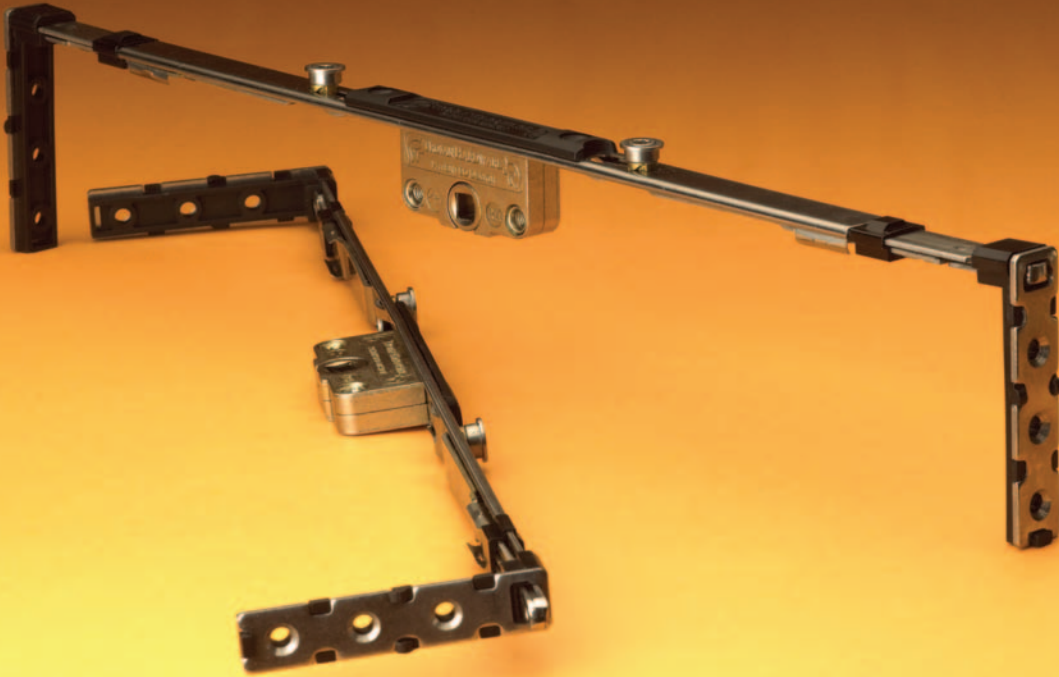

KEY PRODUCT FEATURES

- Stainless steel construction for ultimate corrosion resistance.
- Fast-fit telescopic design with auto setting function which reduces fabrication time with no need for cropping.
- Clips into Eurogroove reducing the number of screws required.
- Rising cam system which provides better sash to frame clearance.
- Compression adjustable locking cams.
- Supplied as a kit, complete with keeps.
- High security accredited.
- BBA accredited.
- 10 year corrosion and mechanical guarantee.



STALLION 2 SHOOTBOLT



STALLION 2 SHOOTBOLT

TECHNICAL SPECIFICATION

For Eurogroove systems the Stallion 2 is a quick fit telescopic shootbolt that requires no cropping or cutting. It incorporates some added feature benefits including a unique clip in action to the Eurogroove, an automatic self setting action that sets the shootbolt at the required length and rising locking cams to maximise engagement and frame clearance. The Stallion 2 is largely stainless steel in construction to meet ever increasing requirements.

TESTING AND ACCREDITATION

UKAS laboratory tested to BS EN 1670 and has exceeded grade 4 classification for ultimate corrosion resistance.

Operational durability tested to 30,000 cycles.

Has attained BS7950 across a comprehensive range of window systems.

Has Secured By Design accreditation.

Has BBA accreditation certificate number 2755.

PRODUCT MATERIAL SPECIFICATIONS

Zinc die cast components - ZL2 with Zinc passivate finish.

Stainless steel parts are - 430 S17 or 304 stainless steel.

Gearbox reverse gears - carbon steel 70 (CS70).

Plastic parts - glass reinforced Nylon 66.

SASH REBATE RANGES

Standard Sizes

Size 1 = 300mm - 400mm.

Size 2 = 400mm - 540mm.

Size 3 = 540mm - 820mm.

Size 4 = 820mm - 1300mm.

Size 5 = 1300mm - 1750mm.


Offset Sizes

Size 4-2 = 610mm - 920mm (410 - 650 long 200 - 270 short).

Size 4-3 = 680mm - 1060mm (410 - 650 long 270 - 410 short).

Size 5-2 = 850mm - 1145mm (650 - 875 long 200 - 270 short).

Size 5-3 = 920mm - 1285mm (650 - 875 long 270 - 410 short).

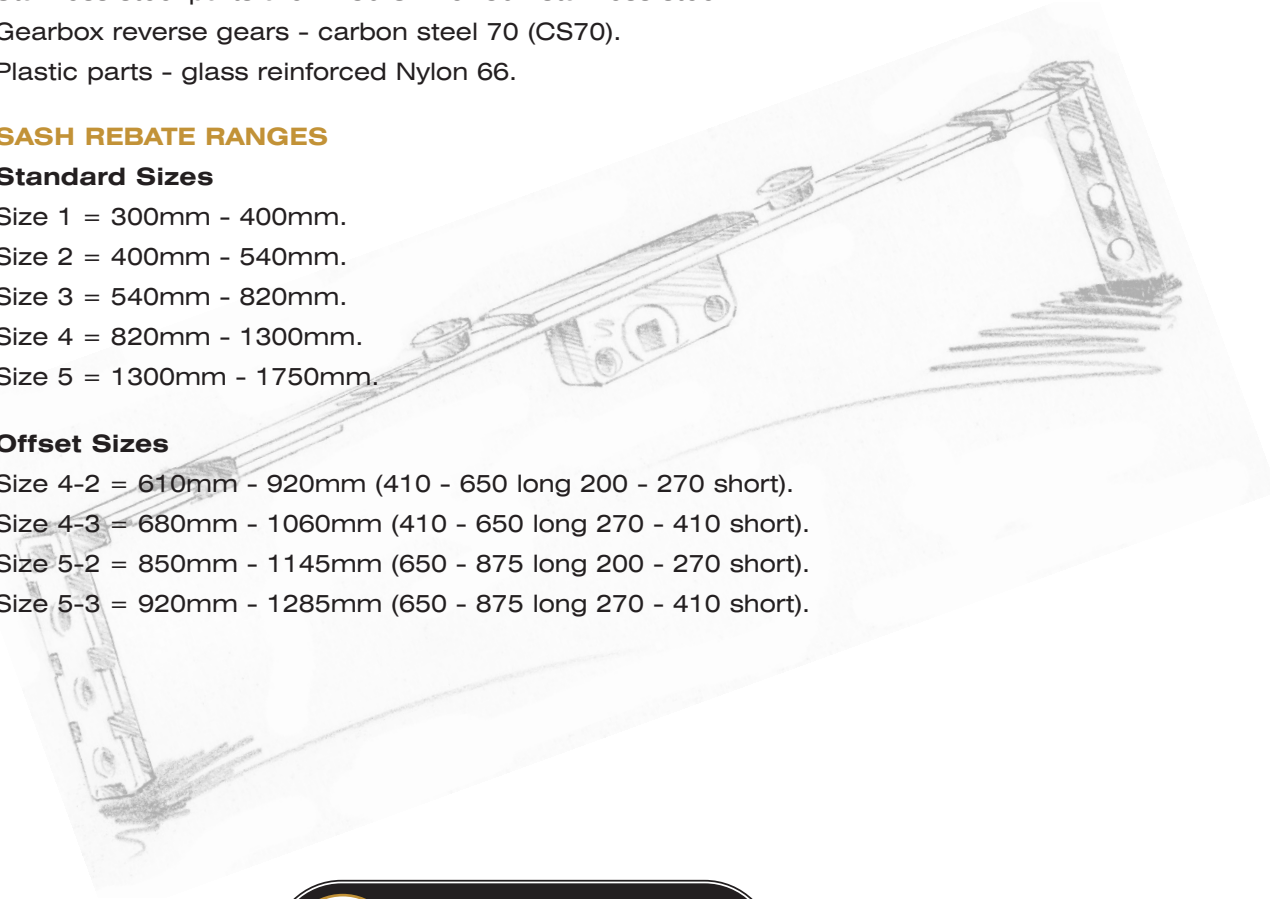

The Strength of Hardware Design



Trojan Manufacturing Group Limited, Fryers Road, Bloxwich, Walsall, West Midlands, WS2 7LZ
T: +44 (0) 1922 713933 F: +44 (0) 1922 713890 E: info@trojanguroup.com W: www.trojanguroup.com

Due to Trojan Group Ltd's policy of continual improvement we reserve the right to alter specifications without notice. In all cases, it is the responsibility of the window manufacturer to ensure that the finished product meets the required specification and performance status.